


SUPERVISORS PLAT OF
TIMBERS SKY HARBOR

PARTS OF GOVT. LOTS 1&2 SEC. 32 T.24.N R.5.E.

PLAINFIELD TWP. IOSCO CO. MICH

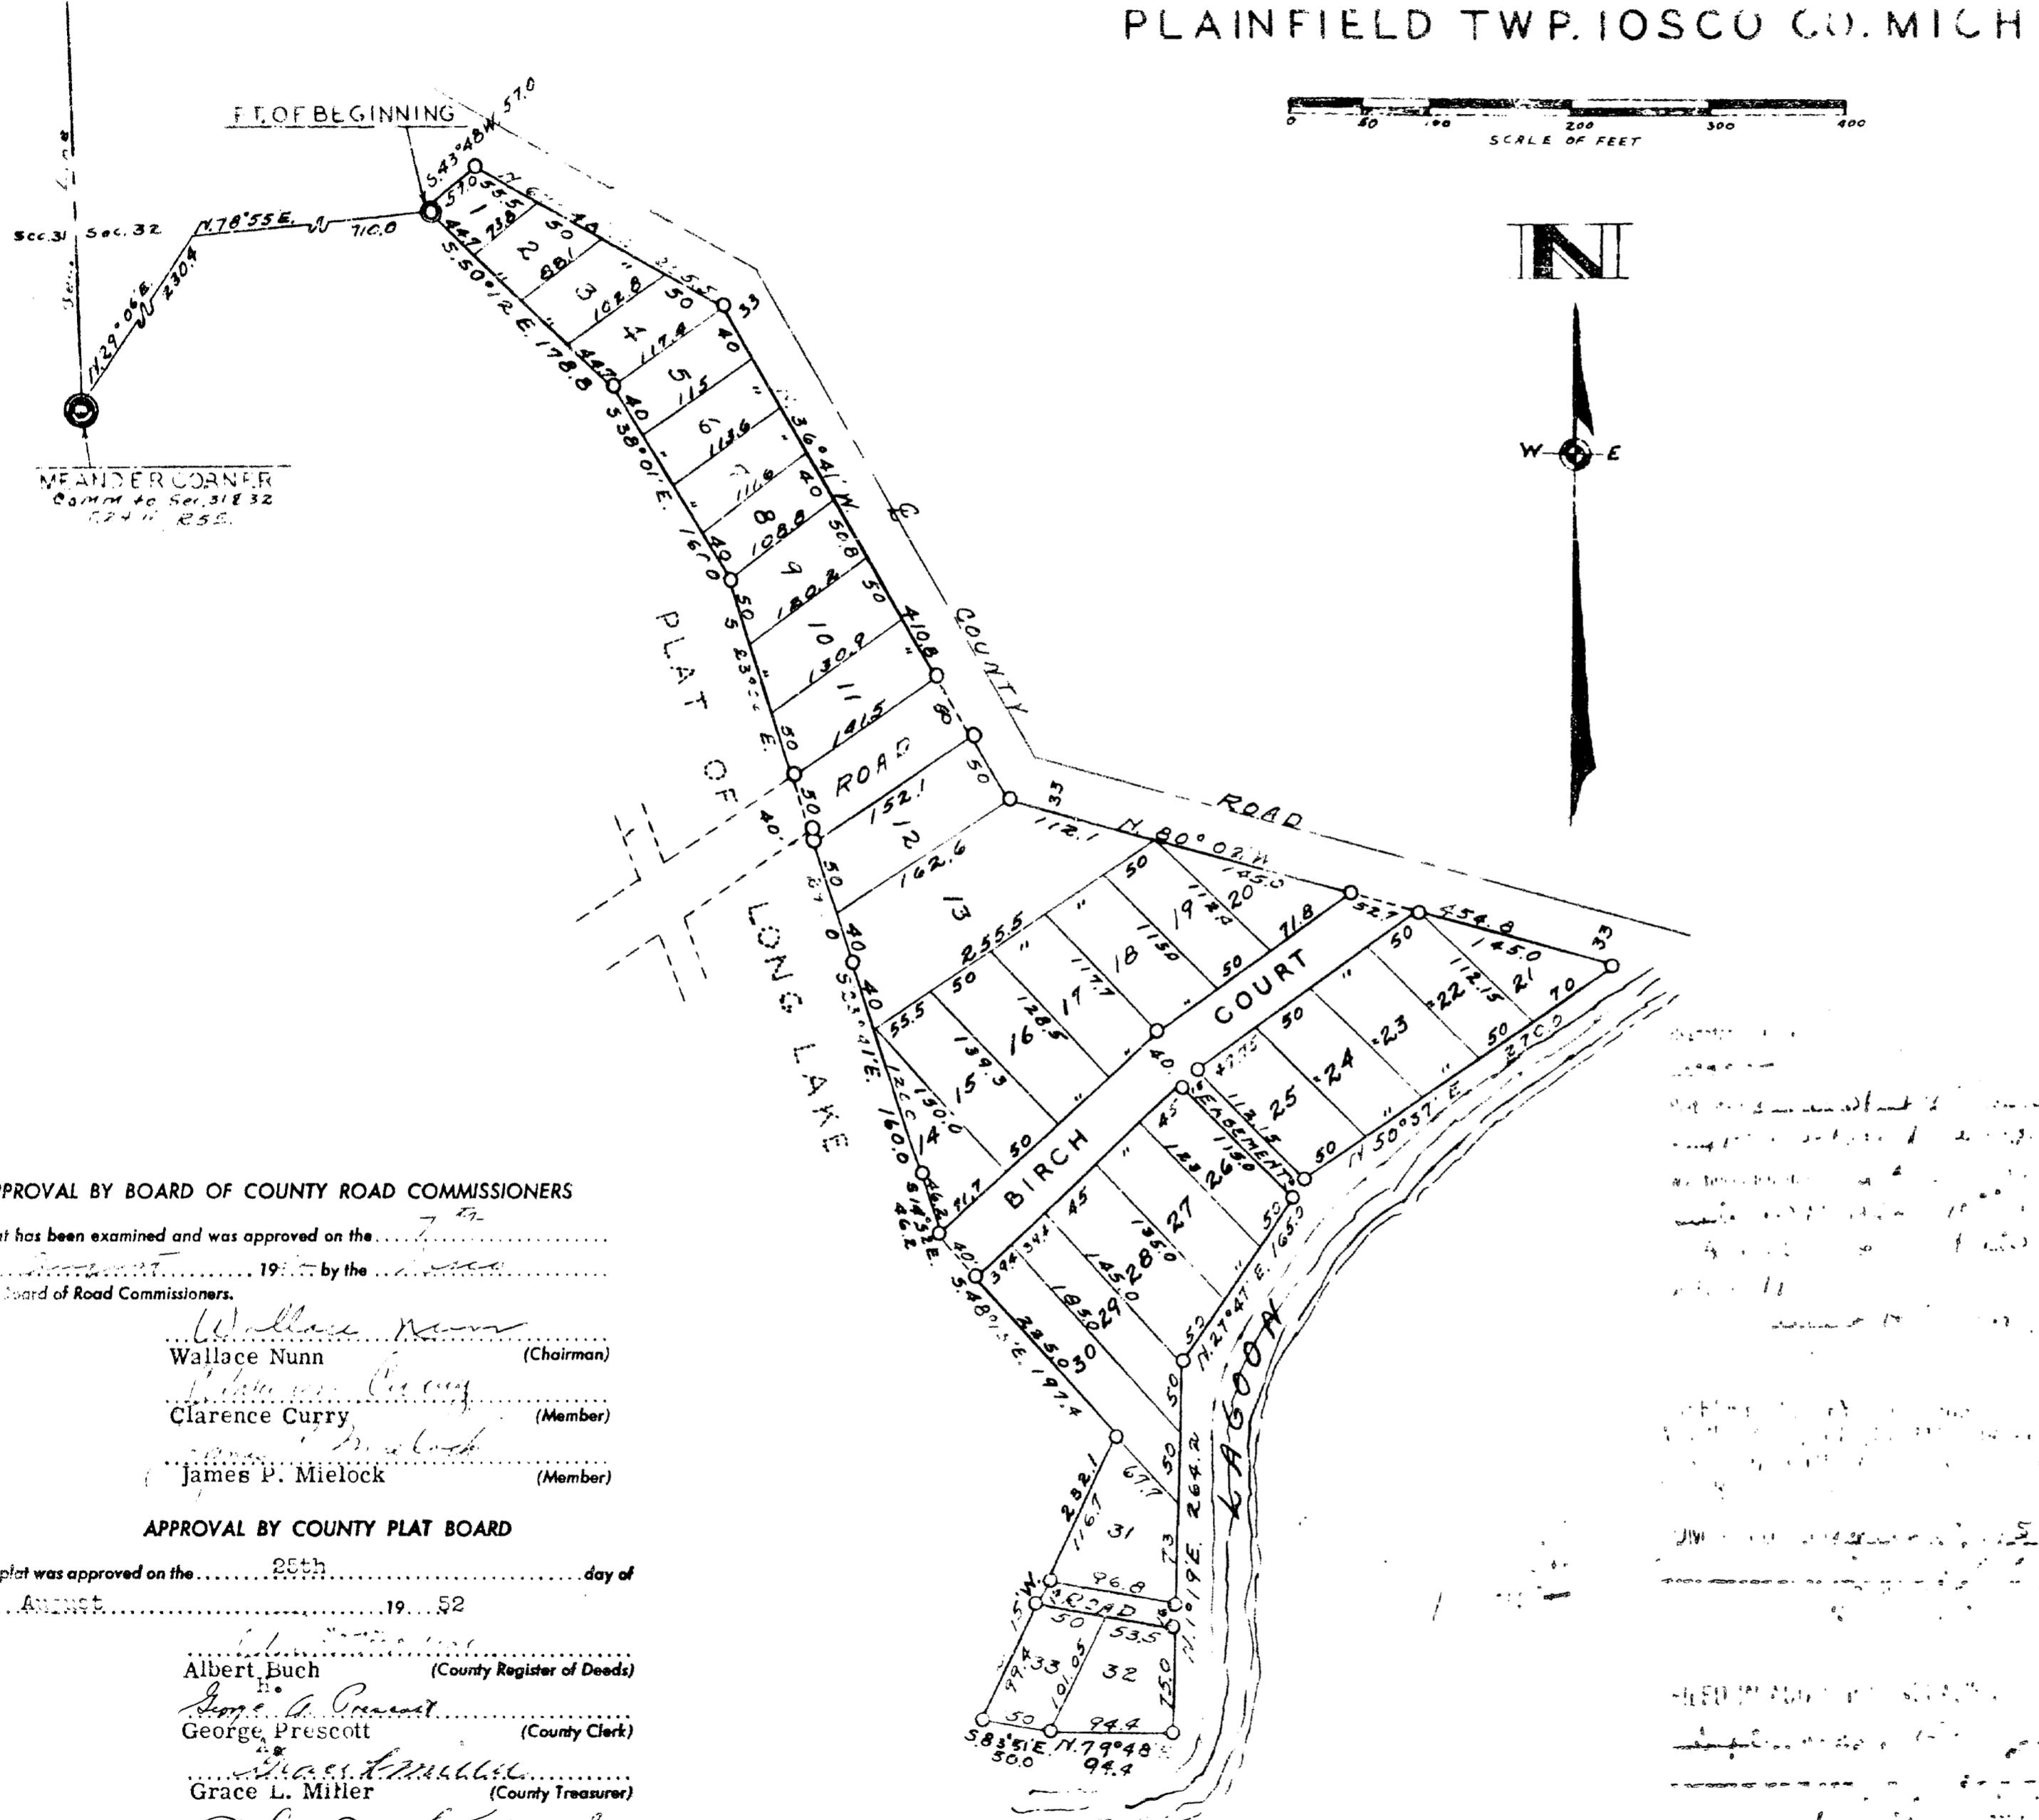

DEDICATION

KNOW ALL MEN BY THESE PRESENTS, That I, George Webb.....
Supervisor of the Township of Plainfield.....

of Iosco County, State of Michigan, by virtue of authority
in me vested by Section 51, Act 172, of 1929, having been duly authorized by the
TOWNSHIP BOARD OF PLAINFIELD
have caused the land described in the annexed plat to be surveyed, laid out and platted,
to be known as SUPERVISOR'S PLAT OF TIMBERSKY .
HARBOR, Parts of Gov't Lots 1 & 2 Sec. 32, T. 24 N.,
R. 5 E., PLAINFIELD TWP., IOSCO CO., MICH;

and that the streets and alleys as shown on said plat are now being used for such purposes.
John C. Miller (Witness) George Webb (Seal)
Supervisor of the township of Plainfield....

ACKNOWLEDGMENT

STATE OF MICHIGAN
County of Lapeer.....

On this.....2..... day of.....Aug. 25..... A.D. 1957,
before me, a Notary Public in and for said county, personally came the above named
.....George Webb,Supervyisorof
Township of PLAINFIELD....., known to me to be the
person who executed the above dedication, and acknowledged the same to be his free
act and deed as suchSUPERVISOR.....

Dennis B. Chrivia
Notary Public In and for Iosco County.
My Commission expires April 2, 1955

DESCRIPTION OF LAND PLATTED

The land embraced in the annexed plot of SUPERVISOR'S PLAT OF....
TIMBER SKY HARBOR PARTS OF Gov't Lots 1&2.....
Sec. 32, T. 24 N., R. 5 E., Plainfield Twp., Iosco Co., Mich.
is described as follows:...Beginning...at.....
a Point N. $29^{\circ} 06'$ E. 230.4 ft., and N.
 $78^{\circ} 55'$ E. 710.0 ft. from the Meander Post on the Sec.
Line Common to Sections 31 & 32 T. 24 N., R. 5 E.,
Plainfield Twp., Iosco Co., Mich. Running thence S. $50^{\circ} 12'$ E. 178.8 ft., thence S. $38^{\circ} 01'$ E. 160.0 ft., thence
S. $23^{\circ} 06'$ E. 290.0 ft., thence S. $23^{\circ} 41'$ E. 160.0 ft.,
thence S. $14^{\circ} 52'$ E. 46.2 ft., thence S. $48^{\circ} 15'$ E. 197.4
ft., thence S. $21^{\circ} 15'$ W. 232.1 ft., thence S. $83^{\circ} 51'$ E.
50.0 ft., thence N. $79^{\circ} 48'$ E. 94.4 ft., thence N. $1^{\circ} 19'$
E. 264.2 ft., thence N. $27^{\circ} 47'$ E. 165.0 ft., thence N. 50°
 $37'$ E. 270.0 ft., thence N. $80^{\circ} 02'$ W. 454.8 ft., thence N.
 $36^{\circ} 41'$ W. 410.8 ft., thence N. $67^{\circ} 48'$ W. 205.5 ft., thence
S. $43^{\circ} 48'$ W. 57.0 ft., to Point of Beginning.

SURVEYOR'S CERTIFICATE

I hereby certify that the plat hereon delineated is a correct one and that permanent metal monuments consisting of bars not less than one-half inch in diameter and 48 inches in length, or shorter bars of not less than one-half inch in diameter lapped over each other at least 6 inches with an over-all length of not less than 48 inches, encased in a concrete cylinder at least 4 inches in diameter and 48 inches in depth have been placed at points marked thus (.....O.) as thereon shown at all angles in the boundaries of the land platted, at all the intersections of streets, intersections of alleys, or of streets and alleys, and at the intersections of streets and alleys with the boundaries of the plat as shown on said plat.

**Registered Land Surveyor or Registered Professional Engineer
John C. Miller**